

GRADUATE SCHOOL OF OCEANOGRAPHY
UNIVERSITY OF RHODE ISLAND
NARRAGANSETT, RHODE ISLAND

THE SYNOP EXPERIMENT:
Inverted Echo Sounder Data Report
for
May 1988 to Aug 1989

GSO Technical Report No. 90-2

by

Erik Fields
and
D. Randolph Watts

May
1990

This research program has been sponsored by the National Science Foundation under grant number OCE87-17144 and by the Office of Naval Research under contract N00014-87-K-0235.

Abstract

The SYNoptic Ocean Prediction experiment (SYNOP) was undertaken with the goal that increased understanding of the Gulf Stream obtained through coordinated observations could be integrated with numerical models, including predictive models of the Gulf Stream. Our moored experiment, which began in fall of 1987, consists of two separate arrays in the Gulf Stream as part of the SYNOP program. The “Inlet” array of inverted echo sounders (IES) and deep current meters measure key parameters that describe the variability of the Gulf Stream and deep western boundary current (DWBC) near Cape Hatteras. In this region the Gulf Stream first flows into deeper water and crosses over the DWBC. The “Central” array of IESs, in a 350 km square centered on the Gulf Stream near 68°W, monitors the thermocline structure of the Gulf Stream in the region of large meanders and frequent interactions with rings. The array also contains twelve tall current meter moorings, that reach into the Gulf Stream core. Additionally most of the IESs in the interior of the array are outfitted with bottom pressure recorders (PIES).

IES data recovered during the summer of 1989 is documented here by plots and tables of basic statistics and pertinent deployment information. Altogether 33 IES records are presented, plus pressure records at 10 sites. The echo sounders were recovered during two cruises of the RV Oceanus, OC207 (26-May-89 to 21-Jun-89) and OC210 (8-Aug-89 to 1-Sep-89). The plots are time series of measured travel time, pressure, temperature; the residual pressure; and low-pass filtered records of residual pressure, thermocline depth, and temperature. A brief description of the experiment is given, the standard steps of data processing and special processing for three IES records that had different problems are discussed.

Contents

Abstract	iii
List of Tables	vi
List of Figures	vii
1 Experiment Description and Data Processing	1
1.1 Introduction	1
1.2 Site Naming Conventions	3
1.3 Inverted Echo Sounder Description	6
1.4 Data Processing	6
1.4.1 Travel Time Calibration	9
1.4.2 Temperature	9
1.4.3 Bottom Pressure	10
1.4.4 Time Base	11
1.4.5 Note on Sample Times	13
1.5 Data Recovery	14
1.6 Special Processing for IES89B4_210	14
1.7 Special Processing for IES89G1_207	15
1.8 Special Processing for PIES89I5_207	16
2 Individual Site and Record Information Tables	17
3 Half-Hourly Individual Plots	73
4 Half-Hourly Line Plots	199
5 40HRLP Line Plots	215
Acknowledgments	231
References	232

List of Tables

1	Site Locations and Data Returns for The Central Array	4
2	Site Locations and Data Returns for The Inlet Array	4
3	Yearhour Calendar	12
4	Site and Record Information for B1	19
5	Site and Record Information for B2	20
6	Site and Record Information for B3	21
7	Site and Record Information for B4_207	22
8	Site and Record Information for B4_210	23
9	Site and Record Information for B5_207	24
10	Site and Record Information for B5_210	25
11	Site and Record Information for C1	26
12	Site and Record Information for C2	27
13	Site and Record Information for F1	28
14	Site and Record Information for F2	29
15	Site and Record Information for F3	30
16	Site and Record Information for G1	31
17	Site and Record Information for G2	32
18	Site and Record Information for G3	35
19	Site and Record Information for G4	38
20	Site and Record Information for H1	39
21	Site and Record Information for H2	40
22	Site and Record Information for H3	41
23	Site and Record Information for H4	44
24	Site and Record Information for H5	47
25	Site and Record Information for H6	50
26	Site and Record Information for H7_207	53
27	Site and Record Information for H7_210	54
28	Site and Record Information for I1	55
29	Site and Record Information for I2	58
30	Site and Record Information for I4	61
31	Site and Record Information for I5	64
32	Site and Record Information for J1	67
33	Site and Record Information for J2	68
34	Site and Record Information for J3	69
35	Site and Record Information for J4	70
36	Site and Record Information for J5	71

List of Figures

1	Array locations and instrument sites	2
2	IES Deployment Chart	5
3	IES Data Processing Flowchart	8
4	Sampling Sequences for URI and Sea Data Model IESs	13
5	Cassette Tape Bit Layout	15
6	Half-Hourly Travel Time Plots	75
6.1	IES89B1_207	75
6.2	IES89B2_210	77
6.3	IES89B3_210	79
6.4	IES89B4_207	81
6.5	IES89B4_210	83
6.6	IES89B5_207	84
6.7	IES89B5_210	86
6.8	IES89C1_207	87
6.9	IES89C2_210	89
6.10	IES89F1_207	91
6.11	IES89F2_210	93
6.12	IES89F3_210	95
6.13	IES89G1_207	97
6.14	PIES89G2_213	100
6.15	PIES89G3_207	102
6.16	IES89G4_207	104
6.17	IES89H1_207	106
6.18	IES89H2_210	108
6.19	PIES89H3_210	109
6.20	PIES89H4_210	111
6.21	PIES89H5_210	113
6.22	PIES89H6_207	115
6.23	IES89H7_207	117
6.24	IES89H7_210	119
6.25	PIES89I1_207	120
6.26	PIES89I2_207	122
6.27	PIES89I4_207	124
6.28	PIES89I5_207	126
6.29	IES89J1_207	128
6.30	IES89J2_207	130
6.31	IES89J3_207	132
6.32	PIES89J4_207	134
6.33	PIES89J5_207	136
7	Half-Hourly Pressure Plots	138
7.1	PIES89G2_213	138
7.2	PIES89G3_207	140
7.3	PIES89H3_210	142
7.4	PIES89H4_210	144
7.5	PIES89H5_210	146
7.6	PIES89H6_207	148

7.7	PIES89I1_207	150
7.8	PIES89I2_207	152
7.9	PIES89I4_207	154
7.10	PIES89I5_207	156
8	Half-Hourly Temperature Plots	158
8.1	PIES89G2_213	158
8.2	PIES89G3_207	160
8.3	PIES89H3_210	162
8.4	PIES89H4_210	164
8.5	PIES89H5_210	166
8.6	PIES89H6_207	168
8.7	PIES89I1_207	170
8.8	PIES89I2_207	172
8.9	PIES89I4_207	174
8.10	PIES89I5_207	176
9	Half-Hourly Residual Bottom Pressure Plots	178
9.1	PIES89G2_213	178
9.2	PIES89G3_207	180
9.3	PIES89H3_210	182
9.4	PIES89H4_210	184
9.5	PIES89H5_210	186
9.6	PIES89H6_207	188
9.7	PIES89I1_207	190
9.8	PIES89I2_207	192
9.9	PIES89I4_207	194
9.10	PIES89I5_207	196
10	Half-Hourly Travel Time Plots By Lines	201
10.1	B line	201
10.2	C line	202
10.3	F line	203
10.4	G line	204
10.5	H line	205
10.6	I line	207
10.7	J line	208
11	Half-Hourly Residual Bottom Pressure Plots By Lines	209
11.1	G line	209
11.2	H line	210
11.3	I line	211
12	Half-Hourly Temperature Plots By Lines	212
12.1	G line	212
12.2	H line	213
12.3	I line	214
13	40HRLP Z_{12} Plots By Lines	217
13.1	B line	217
13.2	C line	218
13.3	F line	219
13.4	G line	220
13.5	H line	221

13.6	I line	223
13.7	J line	224
14	40HRLP Residual Bottom Pressure Plots By Lines	225
14.1	G line	225
14.2	H line	226
14.3	I line	227
15	40HRLP Temperature Plots By Lines	228
15.1	G line	228
15.2	H line	229
15.3	I line	230

1 Experiment Description and Data Processing

1.1 Introduction

In the region northeast of Cape Hatteras, NC, the Gulf Stream has large time-varying meanders. The current shifts within an envelope that grows downstream to several times the instantaneous width of the Gulf Stream itself, and it frequently interacts with powerful currents in eddies adjacent to the Gulf Stream. Fundamental questions remain regarding the dynamics and energy balances governing the meandering. A multi-investigator research effort **SYN**optic **O**cean **P**rediction (SYNOP) is being conducted to understand the physics of, and test predictive models of these energetic processes. Our field program is completing the two-year deployment of arrays of high-performance current meter moorings, reaching into the core of the Gulf Stream, and inverted echo sounders with bottom pressure gauges. The arrays are specifically designed for our objectives to understand the structure and energy exchanges associated with Gulf Stream variability throughout an extensive region where meanders are large and frequent interactions with eddies occur.

The present study aims to understand the structure, energetics, and dynamics of the Gulf Stream in the region between 70° and 65° W, where meanders are of large amplitude and still growing, and where the adjacent ring and eddy field is vigorous.

Using data from current meters, inverted echo sounders (IESs) and IES/bottom pressure sensor combinations, we intend to determine how the path and structure of the Gulf Stream evolve, both according to its internal dynamics and instabilities, and as affected by eddies in the adjacent regions. The full three-dimensional structure of the fluctuations in relation to the mean (T, U, V) fields and their gradients determines the directions and strengths of the key energy exchanges between them. The main objective of our program is a more complete, fundamentally improved understanding of these processes. From this understanding the longer term goal is to guide and test a predictive modeling capability for the Gulf Stream.

IES data were recovered during the summer of 1989 which span from the previous summer. These records were recovered on two cruises aboard the R/V *Oceanus*, OC207 (26-May-89 to 21-Jun-89) and OC210 (8-Aug-89 to 1-Sep-89). One other IES was recovered during OC213 (8-Oct-89). The data are presented in plots of travel times, thermocline depth measurements, and for IES's with additional sensors, bottom pressure and temperature. Basic statistics for those records and pertinent deployment information are given in tables.

Work is also underway on data being received from five telemetry instruments (TIES's) in the inlet array. The TIESs and associated moorings were deployed during OC210. The IES sites (Figure 1) will continue to be occupied until Aug-1990.

Figure 1: Mooring and IES sites. In the inlet array 'X's denote deep current meter moorings; in the central array they indicate tall current meter moorings. IESs are located at these sites and at locations marked by the 'O's. The two dashed curves indicate the ± 1 std dev envelope of the Stream path. The broken lines crossing diagonally represent the ground tracks of the GEOSAT satellite.

1.2 Site Naming Conventions

Two arrays exist (Figure 1), an “Inlet Array” near Cape Hatteras consisting of 9 IESs on 3 lines designated A–C, and a “Central Array” centered on the Gulf Stream about 68 W with 5 instrument lines, F–J. There are 24 instruments in the central array and 12 of those located in the array’s interior at current meter mooring sites are outfitted with bottom pressure recorders. These IES’s are referred to as PIES’s.

The instrument naming convention is to specify the line and the relative position in the line (increasing seaward from the shelf) prefixed by the type of instrument type and year of recovery. For example PIES89H3 would refer to the third instrument, a pressure outfitted IES, in the H line. Thirty-seven IES sites were visited this summer (Figure 1 and 2, Tables 1 and 2). There were only 33 sites in the arrays; some of the sites were revisited for second recoveries. Since some instrument sites had multiple recoveries the associated cruise number of the recovery (207, 210, or 213) will be concatenated to make deployment specification clear.

Site Locations and Data Returns


Table 1: **Central Array**

site	lat(N)	lon(W)	1st point	last point	notes
IES89F1	37° 56.94	69° 57.98	12-Jun-88	05-Jun-89	
IES89F2	37° 24.40	69° 46.50	14-Jun-88	14-Aug-89	
IES89F3	36° 42.10	69° 33.60	14-Jun-88	14-Aug-89	
IES89G1	38° 37.64	69° 25.28	24-Oct-87	27-May-89	two track reconstruction, quality lower time released
PIES89G2	37° 47.52	69° 24.33	27-May-88	12-Sep-89	
PIES89G3	37° 17.40	69° 14.53	26-May-88	29-May-89	
IES89G4	36° 33.19	68° 40.49	06-Jun-88	17-Jun-89	
IES89H1	39° 00.00	68° 40.32	11-Jun-88	02-Jun-89	
PIES89H2	38° 37.88	68° 54.20	lost		faulty release
IES89H2'	38° 25.80	69° 02.00	05-Jun-89	15-Aug-89	15 km down GEOSAT line from lost H2
PIES89H3	38° 10.10	68° 43.30	11-Jun-88	15-Aug-89	
PIES89H4	37° 39.80	68° 35.40	14-Jun-88	15-Aug-89	
PIES89H5	37° 10.60	68° 17.00	07-Jun-88	14-Aug-89	
PIES89H6	36° 40.45	68° 15.64	23-May-88	03-Jun-89	
IES89H7	36° 24.53	67° 47.06	06-Jun-88	17-Jun-89	
IES89H7	36° 24.90	67° 48.10	17-Jun-89	16-Aug-89	recovered to check detector, was fine insufficient tape, ended 4 month early
PIES89I1	38° 47.54	68° 06.38	25-May-88	01-Feb-89	
PIES89I2	38° 20.90	67° 59.60	09-Jun-88	30-May-89	
PIES89I3	37° 47.55	67° 56.50	lost		no response
PIES89I4	37° 18.50	67° 39.30	08-Jun-88	16-Jun-89	
PIES89I5	36° 49.73	67° 27.57	23-May-88	03-Jun-89	tape errors, data quality lower
IES89J1	39° 10.04	67° 47.08	10-Jun-88	30-May-89	
IES89J2	38° 45.59	67° 21.57	10-Jun-88	31-May-89	
IES89J3	38° 09.03	67° 10.06	09-Jun-88	06-Jun-89	
IES89J4	37° 37.84	67° 00.65	10-Jun-88	07-Jun-89	
IES89J5	36° 59.83	66° 56.52	06-Jun-88	16-Jun-89	

Table 2: **Inlet Array**

site	lat(N)	lon(W)	1st point	last point	notes
IES89A1	35° 18.61	74° 36.85	lost		wouldn't leave bottom
IES89A2	34° 58.06	74° 24.96	recovered no data		cold soldier joint on detector card
IES89B1	35° 45.10	74° 28.00	28-May-88	10-Jun-89	
IES89B2	35° 36.92	74° 14.20	30-May-88	10-Aug-89	replaced by telemetry IES
IES89B3	35° 28.96	74° 02.63	29-May-88	10-Aug-89	replaced by telemetry IES
IES89B4	35° 20.70	73° 51.00	29-May-88	11-Jun-89	
IES89B4	35° 20.80	73° 50.50	11-Jun-89	11-Aug-89	replaced by telemetry IES
IES89B5	35° 12.06	73° 40.01	29-May-88	10-Jun-89	
IES89B5	35° 12.04	73° 39.95	11-Jun-89	11-Aug-89	replaced by telemetry IES
IES89C1	36° 04.67	73° 56.90	31-May-88	12-Jun-89	
IES89C2	35° 46.20	73° 32.90	31-May-88	11-Aug-89	

Figure 2: IES deployment Chart. The duration and temporal location of each IES is charted as a thin rectangle. The length of each rectangle and its horizontal position on the time axis, in yearhour at the bottom, provide a calendar of data coverage, first good ping to last. Each large tic is 1000 hr and the smaller tics denote 100 hr increments.

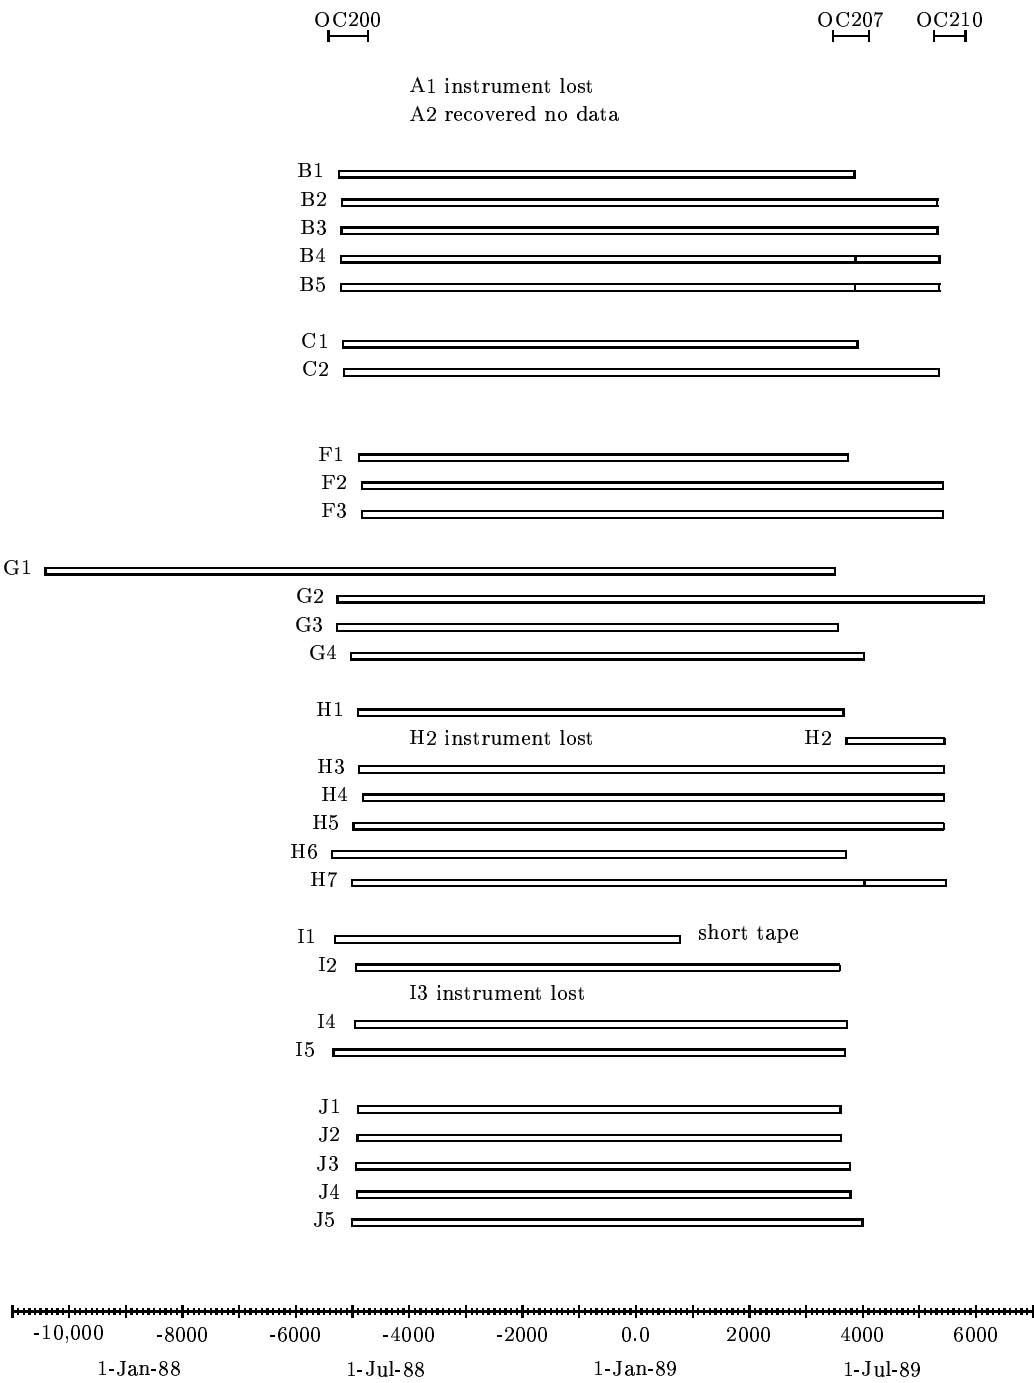

1.3 Inverted Echo Sounder Description

A detailed description of the IES is presented in Chaplin and Watts (1984) and will not be repeated here. Briefly, however, the IES is an instrument which is moored one meter above the ocean floor and which monitors the depth of the main thermocline acoustically. A sample burst of acoustic pulses is transmitted every half hour. A sample burst consists of twenty-four 10 KHz pings. The round trip travel times to the surface and back are recorded on a digital cassette tape within the instrument. For the PIES's, the measured bottom pressure and temperature are also written to tape at that time. Pressure is an average measurement over a half hour sampling period. (For early model PIES's the temperature is also an average measurement over a half hour sample period. Later models average for slightly less than a minute. In section 1.4.5 this will be explained in detail relative to the actual times associated with the measurements.)

1.4 Data Processing

Processing was done on MicroVAX II and MicroVAX III computers. The basic steps include transcription, editing, and conversion into scientific units. The data processing is accomplished by a series of routines specifically developed for the IES. Since these programs are documented elsewhere (Fields, Tracey, and Watts, 1990), the steps are only outlined below (Figure 3).

RAW DATA CASSETTES : Recorded within the instruments. Contain the counts associated with travel time, pressure, and temperature measurements as a series of integer words of varying lengths.

SDR : Runs the Sea Data Reader which transfers the data from cassettes to the MicroVAX for subsequent processing.

BUNS : Converts the series of integer words of varying lengths into standard length 32-bit integer words.

PUNS : Produces integer listings and histograms of the travel time sample bursts. Provides an initial look at data quality and travel time distributions. The histogram is used to determine the limits for maximum and minimum acceptable travel times for

an initial windowing operation in the following step.. The listings are used to establish the first (after launch) and last (before recovery) ‘on bottom’ samples essential for exacting the time base.

MEMOD : Establishes the time base. Determines the modal value of the travel time burst as the representative measurement after application of several windowing operations. Converts all travel time, pressure and temperature counts into specific units of seconds, decibars, and degrees Celsius, respectively.

FILL : Checks for proper incrementing of the time base. Missing samples are inserted using interpolated values.

DETIDE : From user-supplied tidal constituents specific to each site, determines the tidal contribution to the travel times and removes it from the measured values.

DESPIKE : Identifies and replaces travel time spikes with interpolated values.

SEACOR : Removes the effects of seasonal warming and cooling of the surface layers from the travel times. At this stage plots of the half-hourly pressure, temperature and travel time are generated.

RESPO : Removes the tides from the pressure records using tidal response analysis (Munk and Cartwright, 1977) to determine the tidal constituents for each record.

DEDRIFT : Removes long term drifts associated with the pressure sensor and slight imperfection in the IES master clock frequency.

LOW PASS FILTERING : A 2nd order 40 hr low-pass Butterworth filter is applied forward and backwards to the travel time, residual pressure, and temperature records. The smoothed series are subsampled at six hour intervals and plotted. The smoothed subsampled travel time is subsequently calibrated to Z_{12} .

OBJECTIVE MAPPING : Produces daily maps of the depth of the 12°C isotherm as documented in Watts, Tracey and Friedlander, 1988. The results of this step are not presented here. Rather they will be presented in a subsequent data report.

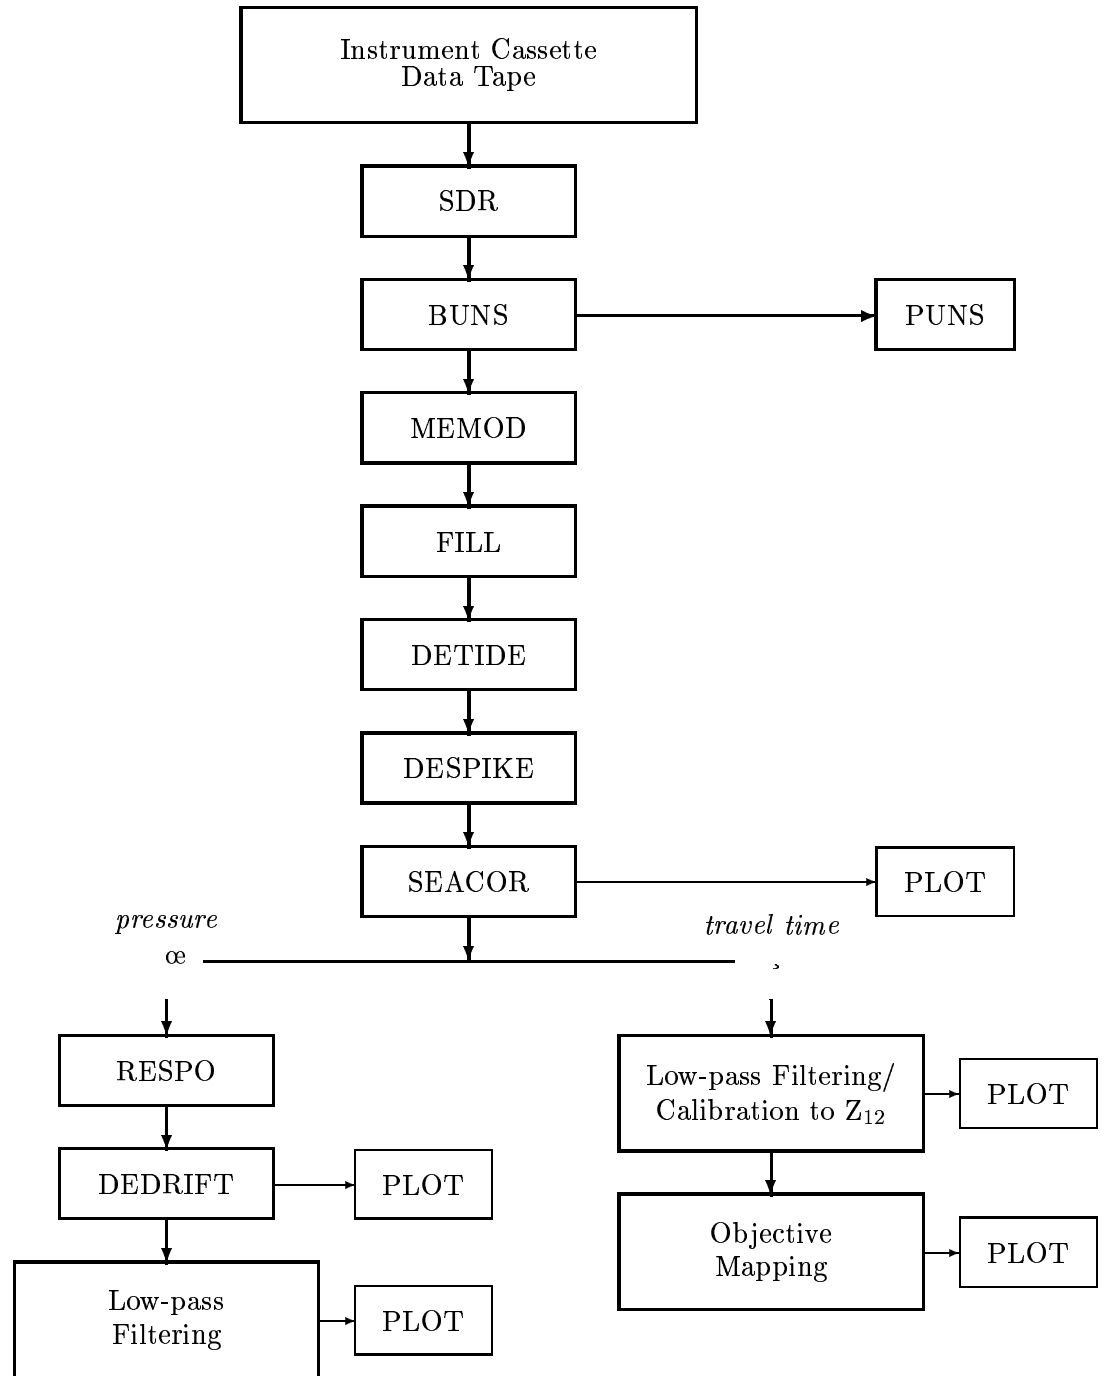


Figure 3: IES Data Processing Flowchart

1.4.1 Travel Time Calibration

The acoustic travel times (τ) records are shown in Figures 6.1– 6.33. Variations in the travel times have been shown to be proportional to variations in the thermocline depth in the Gulf Stream (Watts and Rossby, 1977; Watts and Wimbush 1981, Watts and Johns, 1982). Calibration XBTs were taken at each IES site in order to convert the travel times (τ) into thermocline depths (ξ) according to the relation: $\xi = M\tau + B$, where M is a scale factor and the intercept B depends on the depth of the instrument. Regressions of τ versus ξ , performed for several instruments, show that the constant (M) value, $M = -19.0$ m/msec for the 12°C isotherm, is appropriate for all these Gulf Stream sites. The values of B used for each instrument are listed in the tables in Section 2. For practical purposes the main thermocline depth can be represented by the depth of an individual isotherm. For this work, we have chosen the 12°C isotherm since it is situated near the highest temperature gradients of the main thermocline and correlates well with τ (Rossby, 1969; Watts and Johns, 1982). The low-pass filtered travel time records were scaled to the thermocline depths (Z_{12}) and these records are shown in Figures 13.1– 13.7. Since τ is resolved to 0.1 msec, the 40 HRLP Z_{12} scaled values are therefore resolved to ± 2 m. However, the accuracy of the offset parameter B is estimated to be ± 25 m for most instruments, judged from the agreement between the several calibration XBTs taken at each site. Relative to this, the 40 HRLP Z_{12} values are resolved to ± 2 m.

1.4.2 Temperature

Temperatures (Figures 8.1–8.10, 12.1–12.3, and 15.1–15.3) were measured using thermistors (Yellow Springs International Corp., model 44032) controlled by Sea Data Corp. (model DC-37B) electronics cards installed in the IESs, in order to correct the pressure values for the temperature sensitivity of the transducer. The thermistor is inside the instrument, on the pressure transducer, rather than in the water. However, once the temperature probe has reached equilibrium with the surrounding waters, it also provides accurate measurements of the bottom temperature fluctuations (effectively low-pass filtered with a 2-4 hour e-folding equilibrium time). The first 24 half-hourly points were dropped prior to low-pass filtering, since the temperatures took 12 hours to reach equilibrium within 0.001°C . The accuracy of

the temperature measurements is about 0.1°C , and the resolution is 0.0002°C .

1.4.3 Bottom Pressure

Digiquartz pressure sensor (models 46K-017, 46K-023, and 76KB-032) manufactured by Paroscientific Inc. were used to measure bottom pressure. All pressure measurements were corrected for the temperature sensitivity of the transducer, using calibration coefficients purchased from the manufacturer. The half-hourly measured bottom pressures (Figures 7.1–7.10) are dominated by the tides, however for some of the instruments, the pressures also drift, $0(0.1 \text{ dbar yr}^{-1})$, monotonically with time. Processing of the pressure measurements includes removing the long-term drift and tides.

Tidal response analysis (Munk and Cartwright, 1977) was used to determine the tidal constituents for each instrument. The calculated tides were then removed from the pressure records. The amplitudes, H (dbar), and phases, G° (Greenwich epoch), of the constituents are given in the tables in Section 2.

The pressure records were dedrifted in the same manner developed by Watts and Kon-toyiannis (1990) who have addressed pressure sensor drift and performance. In some records the first 10-40 days exhibit a drift of tenths of decibars. The rate of drift decayed with time and was best approximated by an exponential function. Drifts may also have resulted from slight monotonic drift in the PIES's master clock ($O(1 \text{ min})$ in a year long deployment). When present, the form of the drift curve on which the ocean signal resides was chosen to be either exponential, linear, or a combination of the two. Linear drifts were removed when calculations suggested the drift could be explained by a drifting master clock. For the most general form of the drift curve,

$$Drift = P_1 \exp(-P_2 t) + P_3 + P_4 t$$

a design matrix would be composed of $(\exp(-P_2 t_i), t_i, 1)$. The overdetermined set of equations were solved for coefficients P_1 , P_3 , and P_4 . These coefficients were found subject to the minimization of the rms error of the fit as a function of the decay rate, P_2 . Minimization was accomplished using the method of parabolic extrapolation and golden sections (Press

et al, 1986) to optimally search for P_2 with a minimum of function evaluations (fits). The first 12 hr of pressure were ignored since the crystal's temperature was equilibrating. The dedrifted curves were found from the 2 hr subsampled records for computational simplicity. The time was referenced from 1 hour before the first good sample. At a later stage, comparison of geostrophic currents, calculated from adjacent dedrifted pressure sensors versus nearby current meters will be used to verify the dedrift procedure's success.

Half of the ten PIES showed some sign of drift. Of the five, one was identified as exponential/linear, two were pure exponential, and the remaining two were pure linear. The fitted drift parameters are listed for each instrument individually, in the site and record information tables of Section 2. The half-hourly pressures are resolved to 0.001 dbar and the mean pressure is accurate to within 1.5 dbar. We estimate that the residual (drift and tide removed) bottom pressure records, shown in Figures 9.1–9.10, have an accuracy (relative to their mean pressure) of better than 0.05 dbar (Watts and Kontoyiannis, 1986). The residual bottom pressure records were low-pass filtered (Figures 14.1–14.3) as mentioned above.

1.4.4 Time Base

The date and time were assigned to each sampling period. The Tables (Tables 4–36) in Section 2 report the hours, minutes, and seconds associated with the first and last sampling period as a six-digit number. For the six-hourly subsampled records the times are reported as four-digit numbers. All times are given as Greenwich Mean Time (GMT). For processing convenience, the times were converted into yearhours. A yearhour calendar (Table 3) lists the yearhours which correspond to 0000 GMT of each day for non-leap years. (For leap years, the yearhours can be determined by adding 24 to each day after February 28.) There are a total of 8760 hours in a standard year and 8784 hours in a leap year. The yearhours given in this report are referenced to January 1, 1989 at 0000 GMT.

Table 3: Yearhour Calendar for Non-Leap Years. The yearhour listed corresponds to 0000 GMT

.

1.4.5 Note on Sample Times

There were two IES models, URI and Sea Data (hereafter SD). The SDs were produced by Sea Data Corp and designed from the URI model. The two models have different sampling cadences (Figure 4). Consider the 1800 sec (.5 hr) sampling interval. For comparison it is useful to assign the time 0.0 sec to the instant the previous sample was written to tape, 1800 sec would correspond to the instant the sample of interest is recorded. The relative durations and temporal positioning of samples are mapped in Figure 4. Note the locations at which a sample is located. The centers of the measuring interval for each sensor do not coincide except in the case of the URI model's temperature and pressure. In the URI model the travel time measurement is offset by 115 sec (middle of the duration of 24 pings at 10 sec intervals) from the temperature and pressure, located at 900 sec.

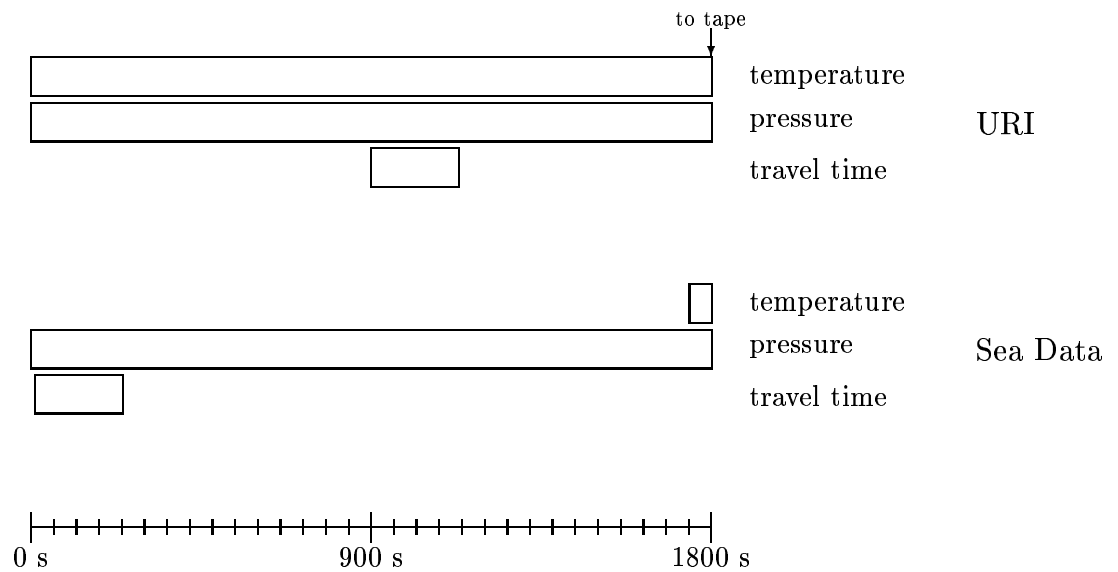


Figure 4: Sampling Sequences for URI and Sea Data Model IESs. The horizontal length and position of the boxes represent the duration and relative temporal location of the sampling periods, respectively. Each tick mark represents a minute.

In the SD model the travel time is located at $115 + 11.25$ sec, pressure will be at 900 sec, and temperature will be at 1771.875 sec ($1800 - 56.25/2$ sec). The temperature interval is also reduced to 56.25 sec (a sixty-fourth of an hour). In the 11.25 sec before the first ping, the SD PIES does its internal bookkeeping and storage to tape. Original processing was done under the wrong understanding that the SD sampled in the same manner as the

URI model. The difference was discovered when the phases of tidal constituents showed a quarter hour discrepancy between models. In future work involving the SD instruments the MEMOD step will to be adjusted to use an average of the two temperature samples that nearly bracket the pressure interval (the one near the end of the .5 hr interval and the one just prior to the start) in the pressure sensor's temperature correction. The steps from RESPO onward were reprocessed with the correct time base. The correct times and tidal constants are listed in Tables 4-36.

1.5 Data Recovery

Tables 1 and 2 and Figure 2 summarize the data returns from each of the IESs. 34 of 37 instrument recoveries were successful (92%). Losses occurred at A1, H2, and I3. The IES89A1 failed to leave bottom and it was presumed to have been stuck in the mud. PIES89H2_207 had a faulty release block and was unable to drop anchor. (PIES89H2_210 was deployed 15 km down a GEOSAT ground track from the old H2. It was sometimes referred to as H2' to distinguish it's different location from the PIES89H2_207.) I3 did not respond to release signals and was not sampling when it was visited for recovery.

The data return from the IESs was successful except for the following cases: there was no data recorded at A2 due to a faulty travel time detector board on that IES and loss of a portion of I1 due to an insufficient length of tape. PIES89G2_213 was recovered on 10/8/89 when it time released, however it stopped logging data a month early for no apparent reason. PIES89G2 did provide data after it's intended original recover date of 5/29/89 and will provide valuable sensor performance information when compared with PIES90G2 deployed at the same location on 6/5/89. The two PIES's coverage overlapped for 100 days. The accuracy of the sensors and the nature of the exponential drift may be evaluated from that period. Overall there was good data in 88% of the records.

1.6 Special Processing for IES89B4_210

In the last 200 hr of IES89B4_210's 1474.5 hr deployment the sequence number was reset 18 times with no apparent explanation. The time base was short 4 hrs and it was assumed that records were lost in the area where the mysterious resetting occurred since the sequence number incremented correctly elsewhere. The resetting had no discernable pattern. Since the record was particularly uneventful (small variance) it was decided to simply add records

Figure 5: Cassette Tape Bit Layout

Normal Storage																		
Track	Bits of Seq #				Bits of τ s													
1	1	5	9	13	<i>1</i>	<i>5</i>	<i>9</i>	<i>13</i>	4	8	12	<i>3</i>	<i>7</i>	<i>11</i>	2	6	10	...
2	2	6	10	14	<i>2</i>	<i>6</i>	<i>10</i>	1	5	9	13	<i>4</i>	<i>8</i>	<i>12</i>	3	7	11	...
3	3	7	11	15	<i>3</i>	<i>7</i>	<i>11</i>	2	6	10	<i>1</i>	<i>5</i>	<i>9</i>	<i>13</i>	4	8	12	...
4	4	8	12	16	<i>4</i>	<i>8</i>	<i>12</i>	3	7	11	<i>2</i>	<i>6</i>	<i>10</i>	1	5	9	13	...

Missing Tracks																		
Track	Bits of Seq #				Bits of τ s													
1	1	5	9	13	<i>1</i>	<i>5</i>	<i>9</i>	<i>13</i>	4	8	12	<i>3</i>	<i>7</i>	<i>11</i>	2	6	10	...
2	2	6	10	14	<i>2</i>	<i>6</i>	<i>10</i>	1	5	9	13	<i>4</i>	<i>8</i>	<i>12</i>	3	7	11	...
3					lost													
4					lost													

at eight locations of maximum sequence number. The inserted values were taken equal to the value before the corresponding reset.

1.7 Special Processing for IES89G1_207

G1 is notable for two reasons: it was out for 20 months (10/24/87 – 5/27/89, deployed during EN169) and secondly it was necessary to reconstruct the record from only two tracks of the four track data storage cassette. The bit map (figure 5) shows how, given only two tracks, the remaining bits of alternating travel time words (τ s) may be bit-wise combined to form a complete word. The italicized numbers denote the remaining bits for the first and the third τ . The first italicized group contains bits 1,2,5,6,9,10, and 13, the second set of italicized bit positions from the third τ contains bits 3,4,7,8,11, and 12. Together they comprise 13 bits of a whole travel time word. The method was verified on records for which all tracks worked, by blanking out tracks 3 and 4 and comparing the reconstituted records with results of the usual processing. For an IES with only small scatter in τ the agreement is excellent. However for G1 the method proved difficult to implement due to an excessively noisy record resulting from an overly sensitive echo detector. In order to get better sampling size, the output record was combined into three-hourly increments rather than half-hourly.

1.8 Special Processing for PIES89I5_207

PIES I5 had a defective tape recorder, and many read errors were encountered in the SDR step. The sequence number and measurement records were excessively noisy. Special care was taken to restore the sequence number and thus the time base. Although the records were restored well it is worth noting that spikes (as identified by the DESPIKE code) composed nearly 30% of the records.

2 Individual Site and Record Information Tables

The tables that follow provide information about the location, dates, and basic statistics of the data records. Each table documents a single instrument deployment. Some instruments were recovered twice, once during cruise OC207 and again during OC210 (H7, B4, and B5) and thus two tables will be found for these sites. The recovery cruise number will be suffixed to the deployment specification to make the distinction clear (For example IES89B4_207 vs IES89B4_210).

General site information, such as position, bottom depth, and launch and recovery times, is given first. Subsequently, details about the travel time, bottom pressure, temperature and thermocline depth records plotted in Sections 3–5 are tabulated. Tables supply the times associated with the first and last data point of each plot. All yearhours are referenced to January 1, 1989 at 0000 GMT. Measurements made during the calendar year prior to the reference date are given as negative yearhours.

The first order statistics (minimum, maximum, mean, and standard deviation) are tabulated for the half-hourly and six-hourly low-passed records (40 HRLP) for each variable of standard IES and PIESs.

Note the absolute travel time displayed should not be interpreted as the round trip travel time. For storage economy only the 13 least significant bits are recorded and wrapping occurs. This has the advantage that full-scale resolution of the variation is ~ 200 msec rather than the full absolute time (~ 6 sec). The variation in travel time is what is utilized. After calibration to thermocline depth all records are on a common basis.

Site and Record Information for IES89B1

Serial Number: 41
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 35°45.10 N DEPTH: 1975 m
 74°28.00 W

	DATE	GMT	CRUISE
LAUNCH:	May 28, 1988	0612	Oc200
RELEASE:	Jun 10, 1989	0855	Oc207

TRAVEL TIME RECORDS

Fig. 6.1 and 10.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 28, 1988	070119	-5224.978
LAST DATA POINT:	Jun 10, 1989	050119	3845.022

Number of Points: 18141
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.22409$ s Mean = 0.21805 s
 Maximum $\tau = 0.21166$ s Standard Deviation = 0.00234 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.1

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 4408 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 29, 1988	0600	-5202
LAST DATA POINT:	Jun 9, 1989	0600	3822

Number of Points: 1505
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 162.9$ m Mean = 265.4 m
 Maximum $Z_{12} = 367.4$ m Standard Deviation = 42.7 m

**Site and Record Information for
IES89B2**

Serial Number: 78
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 35°36.92 N DEPTH: 2650 m
 74°14.20 W

	DATE	GMT	CRUISE
LAUNCH:	May 29, 1988	2353	Oc200
RELEASE:	Aug 10, 1989	0317	Oc210

TRAVEL TIME RECORDS

Fig. 6.2 and 10.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 30, 1988	003224	-5183.460
LAST DATA POINT:	Aug 10, 1989	023224	5306.540

Number of Points: 20981
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.34338\text{s}$ Mean = 0.35087 s
 Maximum $\tau = 0.36395\text{ s}$ Standard Deviation = 0.00382 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.1

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 7103.7 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 31, 1988	0000	-5160
LAST DATA POINT:	Aug 9, 1989	0600	5286

Number of Points: 1742
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 162.9\text{ m}$ Mean = 265.4 m
 Maximum $Z_{12} = 367.4\text{ m}$ Standard Deviation = 71.1 m

Table 5: **IES89B2**

**Site and Record Information for
IES89B3**

Serial Number: 77
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 35°28.96 N DEPTH: 2985 m
74°02.63 W

	DATE	GMT	CRUISE
LAUNCH:	May 29, 1988	2038	Oc200
RELEASE:	Aug 10, 1989	0737	Oc210

TRAVEL TIME RECORDS

Fig. 6.3 and 10.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 29, 1988	213242	-5186.455
LAST DATA POINT:	Aug 10, 1989	073242	5311.545

Number of Points: 20997
Sampling Interval: 0.5 hr

Minimum $\tau = 0.37978$ s Mean = 0.38553 s
Maximum $\tau = 0.40300$ s Standard Deviation = 0.00271 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.1

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B= 7938.7 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 30, 1988	1800	-5166
LAST DATA POINT:	Aug 9, 1989	0600	5286

Number of Points: 1743
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 294.5$ m Mean = 614.0 m
Maximum $Z_{12} = 708.3$ m Standard Deviation = 50.3 m

Table 6: **IES89B3**

**Site and Record Information for
IES89B4_207**

Serial Number: 76
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 35°20.70 N DEPTH: 3325 m
 73°51.00 W

	DATE	GMT	CRUISE
LAUNCH:	May 29, 1988	1530	Oc200
RELEASE:	Jun 11, 1989	0344	Oc207

TRAVEL TIME RECORDS

Fig. 6.4 and 10.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 29, 1988	163217	-5191.462
LAST DATA POINT:	Jun 11, 1989	033217	3867.538

Number of Points: 18119
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.04364$ s Mean = 0.04902 s
 Maximum $\tau = 0.05792$ s Standard Deviation = 0.00174 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.1

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 1693.7 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 30, 1988	1800	-5166
LAST DATA POINT:	Jun 10, 1989	0600	3846

Number of Points: 1503
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 603.6$ m Mean = 762.5 m
 Maximum $Z_{12} = 851.4$ m Standard Deviation = 32.1 m

Table 7: **IES89B4_207**

**Site and Record Information for
IES89B4_210**

Serial Number: 79
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 35°20.80 N DEPTH: 3325 m
73°50.50 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 11, 1989	0538	Oc207
RELEASE:	Aug 11, 1989	1725	Oc210

TRAVEL TIME RECORDS

Fig. 6.5 and 10.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1989	063112	3870.520
LAST DATA POINT:	Aug 11, 1989	170112	5345.020

Number of Points: 2950
Sampling Interval: 0.5 hr

Minimum $\tau = 0.05094$ s Mean = 0.05335 s
Maximum $\tau = 0.05719$ s Standard Deviation = 0.01063 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.1

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B= 1720.9 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1989	0600	3894
LAST DATA POINT:	Aug 10, 1989	1800	5322

Number of Points: 239
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 647.2$ m Mean = 708.2 m
Maximum $Z_{12} = 738.8$ m Standard Deviation = 18.3 m

Table 8: **IES89B4_210**

**Site and Record Information for
IES89B5_207**

Serial Number: 75
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 35°12.06 N DEPTH: 3620 m
73°40.01 W

	DATE	GMT	CRUISE
LAUNCH:	May 29, 1988	1148	Oc200
RELEASE:	Jun 10, 1989	2153	Oc207

TRAVEL TIME RECORDS

Fig. 6.6 and 10.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 29, 1988	130224	-5194.960
LAST DATA POINT:	Jun 10, 1989	213224	3861.540

Number of Points: 18114
Sampling Interval: 0.5 hr

Minimum $\tau = 0.06632$ s Mean = 0.05719 s
Maximum $\tau = 0.04909$ s Standard Deviation = 0.00217 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.1

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B = 1900.6 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 30, 1988	1200	-5172
LAST DATA POINT:	Jun 10, 1989	0000	3840

Number of Points: 1503
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 652.9$ m Mean = 814.0 m
Maximum $Z_{12} = 953.1$ m Standard Deviation = 39.8 m

Table 9: **IES89B5_207**

**Site and Record Information for
IES89B5_210**

Serial Number: 80
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 35°12.04 N DEPTH: 3773 m
73°39.95 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 11, 1989	2343	Oc207
RELEASE:	Aug 11, 1989	1318	Oc210

TRAVEL TIME RECORDS

Fig. 6.7 and 10.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1989	010116	3865.021
LAST DATA POINT:	Aug 11, 1989	130116	5341.021

Number of Points: 2953
Sampling Interval: 0.5 hr

Minimum $\tau = 0.05100$ s Mean = 0.05391 s
Maximum $\tau = 0.05630$ s Standard Deviation = 0.00106 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.1

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B= 1796.4 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1989	0000	3888
LAST DATA POINT:	Aug 10, 1989	1200	5316

Number of Points: 239
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 739.1$ m Mean = 772.5 m
Maximum $Z_{12} = 816.0$ m Standard Deviation = 19.1 m

Table 10: **IES89B5_210**

**Site and Record Information for
IES89C1**

Serial Number: 40
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 36°04.67 N DEPTH: 3130 m
73°56.90 W

	DATE	GMT	CRUISE
LAUNCH:	May 31, 1988	0434	Oc200
RELEASE:	Jun 12, 1989	0915	Oc207

TRAVEL TIME RECORDS

Fig. 6.8 and 10.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 31, 1988	053155	-5154.468
LAST DATA POINT:	Jun 12, 1989	085906	3896.985

Number of Points: 18104
Sampling Interval: 0.5 hr

Minimum $\tau = 0.18336$ s Mean = 0.19284 s
Maximum $\tau = 0.20452$ s Standard Deviation = 0.00499 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.2

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B = 4035.3 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 1, 1988	0600	-5130
LAST DATA POINT:	Jun 11, 1989	1200	3876

Number of Points: 1502
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 167.6$ m Mean = 371.9 m
Maximum $Z_{12} = 535.1$ m Standard Deviation = 93.965

Site and Record Information for IES89C2

Serial Number: 46
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 35°46.20 N DEPTH: 3450 m
 73°32.90 W

	DATE	GMT	CRUISE
LAUNCH:	May 31, 1988	0915	Oc200
RELEASE:	Aug 11, 1989	0724	Oc210

TRAVEL TIME RECORDS

Fig. 6.9 and 10.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 31, 1988	101655	-5149.718
LAST DATA POINT:	Aug 11, 1989	071308	5335.219

Number of Points: 20971
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.18968$ s Mean = 0.19567 s
 Maximum $\tau = 0.20892$ s Standard Deviation = 0.00287 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.2

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 4413.6 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 1, 1988	1200	-5124
LAST DATA POINT:	Aug 10, 1989	0600	5310

Number of Points: 1740
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 477.2$ m Mean = 696.5 m
 Maximum $Z_{12} = 796.2$ m Standard Deviation = 53.3 m

Table 12: **IES89C2**

**Site and Record Information for
IES89F1**

Serial Number: 47
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 37°56.94 N DEPTH: 3980 m
69°57.98 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 12, 1988	0138	OC200
RELEASE:	Jun 5, 1989	0721	OC207

TRAVEL TIME RECORDS

Fig. 6.10 and 10.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1988	023155	-4869.468
LAST DATA POINT:	Jun 5, 1989	065841	3726.978

Number of Points: 17194
Sampling Interval: 0.5 hr

Minimum $\tau = 0.38300$ s Mean = 0.40087 s
Maximum $\tau = 0.41211$ s Standard Deviation = 0.00655 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.3

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B = 7930 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1988	0000	-4848
LAST DATA POINT:	Jun 04, 1989	0600	3702

Number of Points: 1426
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 123.1$ m Mean = 314.3 m
Maximum $Z_{12} = 636.1$ m Standard Deviation = 123.6 m

Site and Record Information for IES89F2

Serial Number: 58
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 37°24.40 N DEPTH: 4245 m
 69°46.50 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 14, 1988	0150	Oc200
RELEASE:	Aug 14, 1989	0205	Oc210

TRAVEL TIME RECORDS

Fig. 6.11 and 10.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 14, 1988	024644	-4821.221
LAST DATA POINT:	Aug 14, 1989	014644	5401.779

Number of Points: 20447
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.06965$ s Mean = 0.04475 s
 Maximum $\tau = 0.03396$ s Standard Deviation = 0.00714 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.3

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 1499 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 15, 1988	0000	-4800
LAST DATA POINT:	Aug 13, 1989	0000	5376

Number of Points: 1697
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 191.9$ m Mean = 649.4 m
 Maximum $Z_{12} = 841.3$ m Standard Deviation = 134.9 m

Table 14: **IES89F2**

**Site and Record Information for
IES89F3**

Serial Number: 61
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 36°42.10 N DEPTH: 4400 m
69°33.60 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 14, 1988	0609	Oc200
RELEASE:	Aug 14, 1989	0903	Oc210

TRAVEL TIME RECORDS

Fig. 6.12 and 10.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 14, 1988	070155	-4816.968
LAST DATA POINT:	Aug 14, 1989	082942	5408.495

Number of Points: 20452
Sampling Interval: 0.5 hr

Minimum $\tau = 0.26175$ s Mean = 0.26973 s
Maximum $\tau = 0.28915$ s Standard Deviation = 0.00297 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.3

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B = 5962 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 15, 1988	0600	-4794
LAST DATA POINT:	Aug 13, 1989	0600	5382

Number of Points: 1697
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 603.1$ m Mean = 837.3 m
Maximum $Z_{12} = 976.3$ m Standard Deviation = 56.1 m

**Site and Record Information for
IES89G1**

Serial Number: 39
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 38°37.64 N DEPTH: 3362 m
69°25.28 W

	DATE	GMT	CRUISE
LAUNCH:	Oct 24, 1987	2022	En169
RELEASE:	May 27, 1989	0649	Oc207

TRAVEL TIME RECORDS

Fig. 6.13 and 10.4

	DATE	GMT	YEARHOUR
1st DATA POINT:	Oct 25, 1987	094424	-10406.26
LAST DATA POINT:	May 26, 1989	184424	3498.740

Number of Points: 4643
Sampling Interval: 3 hr

Minimum $\tau = 0.07881$ s Mean = 0.08956 s
Maximum $\tau = 0.09476$ s Standard Deviation = 0.03337 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.4

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B= 1888 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Oct 26, 19887	1200	-10380
LAST DATA POINT:	May 25, 1989	1800	3474

Number of Points: 2310
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 92.8$ m Mean = 186.4 m
Maximum $Z_{12} = 388.0$ m Standard Deviation = 63.1 m

**Site and Record Information for
PIES89G2**

Serial Number: 70
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 33808

POSITION: 37°47.52 N DEPTH: 4060 m
 69°24.33 W

	DATE	GMT	CRUISE
LAUNCH:	May 27, 1988	0115	Oc200
TIMED RELEASE:	Oct 8, 1989	1500	Oc213

TRAVEL TIME RECORDS

Fig. 6.14 and 10.4

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 27, 1988	023155	-5253.468
LAST DATA POINT:	Sep 12, 1989	120831	6132.142

Number of Points: 22772
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.19591$ s Mean = 0.21319 s
 Maximum $\tau = 0.22733$ s Standard Deviation = 0.00787 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.4

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 4372 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 28, 1988	0000	-5232
LAST DATA POINT:	Sep 12, 1989	1200	6108

Number of Points: 1891
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 68.8$ m Mean = 321.4 m
 Maximum $Z_{12} = 639.3$ m Standard Deviation = 149.0 m

PIES89G2 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 27, 1988	024449	-5253.253
LAST DATA POINT:	Sep 13, 1989	122125	6132.357

Number of Points: 22772

Sampling Interval: 0.5 hrs

Minimum = 4141.68 dbar

Mean = 4142.44 dbar

Maximum = 4143.29 dbar Standard Deviation = 0.32777 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.1 and 11.1

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = P_3 + P_4 t$$

where t = Time of sample in hours, starting with
t = 13.0hrs for the first data point

$$P_3 = 0.094320 \text{ dbar}$$

$$P_4 = -1.6555 \times 10^{-5} \text{ dbar hr}^{-1}$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42965	.09710	.09237	.02186	.08269	.06432	.02720	.01410
G° :	352.74	333.93	20.41	22.34	177.35	182.20	178.12	180.12

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 27, 1988	144449	-5241.253
LAST DATA POINT:	Sep 13, 1989	122125	6132.357

Number of Points: 22748

Sampling Interval: 0.5 hrs

Minimum = -0.1443 dbar

Mean = 0.0000 dbar

Maximum = 0.1387 dbar Standard Deviation = 0.0399 dbar

PIES89G2 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 28, 1988	1200	-5220
LAST DATA POINT:	Sep 12, 1989	1200	6108

Number of Points: 1889

Sampling Interval: 6.0 hrs

Minimum = -0.1203 dbar

Mean = 0.0000 dbar

Maximum = 0.1177 dbar Standard Deviation = 0.037 dbar

TEMPERATURE RECORDS

Fig. 8.1 and 12.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 27, 1988	025920	-5253.011
LAST DATA POINT:	Sep 13, 1989	123556	6132.599

Number of Points: 22772

Sampling Interval: 0.5 hrs

Minimum = 2.510°C

Mean = 2.557°C

Maximum = 2.610°C Standard Deviation = 0.0097°C

40HRLP TEMPERATURE RECORDS

Fig. 15.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 28, 1988	0000	-5232
LAST DATA POINT:	Sep 12, 1989	1200	6108

Number of Points: 1891

Sampling Interval: 6.0 hrs

Minimum = 2.512 °C

Mean = 2.557 °C

Maximum = 2.602 °C Standard Deviation = 0.009 °C

Site and Record Information for PIES89G3

Serial Number: 69
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 33816

POSITION: 37°17.40 N DEPTH: 4358 m
 69°14.53 W

	DATE	GMT	CRUISE
LAUNCH:	May 26, 1988	1452	OC200
RELEASE:	May 29, 1989	0135	OC207

TRAVEL TIME RECORDS

Fig. 6.15 and 10.4

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 26, 1988	160217	-5263.962
LAST DATA POINT:	May 29, 1989	013217	3553.538

Number of Points: 17636
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.18767$ s Mean = 0.19746 s
 Maximum $\tau = 0.22405$ s Standard Deviation = 0.00555 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.4

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 4414 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 27, 1988	1800	-5238
LAST DATA POINT:	May 28, 1989	0000	3528

Number of Points: 1462
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 199.6$ m Mean = 662.4 m
 Maximum $Z_{12} = 828.7$ m Standard Deviation = 104.3 m

Table 18: **PIES89G3**

PIES89G3 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 26, 1988	161510	-5263.747
LAST DATA POINT:	May 29, 1989	014510	3553.753

Number of Points: 17636

Sampling Interval: 0.5 hrs

Minimum = 4456.35 dbar

Mean = 4457.11 dbar

Maximum = 4457.92 dbar Standard Deviation = 0.32336 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.2 and 11.1

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = 0.0$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42744	.09658	.09287	.02206	.08179	.06424	.02695	.01398
G° :	352.90	334.27	20.63	22.59	178.01	182.75	178.80	180.45

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 27, 1988	041510	-5251.747
LAST DATA POINT:	May 29, 1989	014510	3553.753

Number of Points: 17612

Sampling Interval: 0.5 hrs

Minimum = -0.1418 dbar

Mean = 0.0001 dbar

Maximum = 0.1794 dbar Standard Deviation = 0.0465 dbar

PIES89G3 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 28, 1988	0600	-5226
LAST DATA POINT:	May 28, 1989	0000	3528

Number of Points: 1460

Sampling Interval: 6.0 hrs

Minimum = -0.1207 dbar

Mean = 0.0001 dbar

Maximum = 0.1537 dbar Standard Deviation = 0.0440 dbar

TEMPERATURE RECORDS

Fig. 8.2 and 12.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 26, 1988	162942	-5263.505
LAST DATA POINT:	May 29, 1989	015942	3553.995

Number of Points: 17636

Sampling Interval: 0.5 hrs

Minimum = 2.576°C

Mean = 2.622°C

Maximum = 2.685°C Standard Deviation = 0.0105°C

40HRLP TEMPERATURE RECORDS

Fig. 15.1

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 27, 1988	1800	-5238
LAST DATA POINT:	May 28, 1989	0000	3528

Number of Points: 1462

Sampling Interval: 6.0 hrs

Minimum = 2.590 °C

Mean = 2.622 °C

Maximum = 2.672 °C Standard Deviation = 0.010 °C

**Site and Record Information for
IES89G4**

Serial Number: 57
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 36°33.19 N DEPTH: 4675 m
 68°40.49 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 6, 1988	0142	Oc200
RELEASE:	Jun 17, 1989	0905	Oc207

TRAVEL TIME RECORDS

Fig. 6.16 and 10.4

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 6, 1988	030155	-5012.968
LAST DATA POINT:	Jun 17 1989	082450	4016.414

Number of Points: 18060
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.23441$ s Mean = 0.24419 s
 Maximum $\tau = 0.25376$ s Standard Deviation = 0.27461 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.4

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 5480 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 07, 1988	0000	-4992
LAST DATA POINT:	Jun 16, 1989	0600	3990

Number of Points: 1498
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 683.2$ m Mean = 850.6 m
 Maximum $Z_{12} = 1022.2$ m Standard Deviation = 51.382

Site and Record Information for IES89H1

Serial Number: 30
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 39°00.00 N DEPTH: 3255 m
 68°40.32 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 11, 1988	0116	Oc200
RELEASE:	Jun 2, 1989	0332	Oc207

TRAVEL TIME RECORDS

Fig. 6.17 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	021655	-4893.718
LAST DATA POINT:	Jun 2, 1989	031229	3651.208

Number of Points: 17091
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.32683$ s Mean = 0.34289 s
 Maximum $\tau = 0.35020$ s Standard Deviation = 0.00521 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 6722 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1988	0000	-4872
LAST DATA POINT:	Jun 1, 1989	0600	3630

Number of Points: 1418
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 89.4$ m Mean = 207.4 m
 Maximum $Z_{12} = 495.4$ m Standard Deviation = 98.6 m

**Site and Record Information for
IES89H2**

Serial Number: 39
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 38°25.80 N DEPTH: 3580 m
69°02.00 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 5, 1989	0056	Oc207
RELEASE:	Aug 15, 1989	0922	Oc210

TRAVEL TIME RECORDS

Fig. 6.18 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 5, 1989	023152	3722.531
LAST DATA POINT:	Aug 15, 1989	090152	5433.031

Number of Points: 3422
Sampling Interval: 0.5 hr

Minimum $\tau = 0.38293$ s Mean = 0.39008 s
Maximum $\tau = 0.39440$ s Standard Deviation = 0.00272 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B = 7593 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 6, 1989	0000	3744
LAST DATA POINT:	Aug 14, 1989	1200	5412

Number of Points: 279
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 112.5$ m Mean = 180.6 m
Maximum $Z_{12} = 296.3$ m Standard Deviation = 50.3 m

Site and Record Information for PIES89H3

Serial Number: 65
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 28197

POSITION: 38°10.10 N DEPTH: 4030 m
 68°43.30 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 11, 1988	1539	Oc200
RELEASE:	Aug 15, 1989	0538	Oc210

TRAVEL TIME RECORDS

Fig. 6.19 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	163217	-4879.462
LAST DATA POINT:	Aug 15, 1989	053217	5429.538

Number of Points: 20619
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.14899$ s Mean = 0.16890 s
 Maximum $\tau = 0.17573$ s Standard Deviation = 0.00364 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 3410 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1988	1800	-4854
LAST DATA POINT:	Aug 14, 1989	0600	5406

Number of Points: 1711
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 89.7$ m Mean = 200.9 m
 Maximum $Z_{12} = 557.5$ m Standard Deviation = 68.5 m

Table 22: PIES89H3

PIES89H3 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	164509	-4879.247
LAST DATA POINT:	Aug 15, 1989	054509	5429.753

Number of Points: 20619

Sampling Interval: 0.5 hrs

Minimum = 4102.14 dbar

Mean = 4102.96 dbar

Maximum = 4103.79 dbar Standard Deviation = 0.32310 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.3 and 11.2

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = P_1 \exp(-P_2 t) + P_3$$

where t = Time of sample in hours, starting with
t = 13.0hrs for the first data point

$$P_1 = -0.26320 \text{ dbar}$$

$$P_2 = 0.001902 \text{ hr}^{-1}$$

$$P_3 = 0.013198 \text{ dbar}$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42613	.09661	.09351	.02227	.08131	.06337	.02676	.01384
G°:	352.76	333.84	20.62	22.50	176.43	181.21	177.24	178.76

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1988	044509	-4867.247
LAST DATA POINT:	Aug 15, 1989	054509	5429.753

Number of Points: 20595

Sampling Interval: 0.5 hrs

Minimum = -0.1379 dbar

Mean = 0.0000 dbar

Maximum = 0.1412 dbar Standard Deviation = 0.0401 dbar

PIES89H3 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 13, 1988	0600	-4842
LAST DATA POINT:	Aug 14, 1989	0600	5406

Number of Points: 1709

Sampling Interval: 6.0 hrs

Minimum = -0.1066 dbar

Mean = 0.0002 dbar

Maximum = 0.1207 dbar Standard Deviation = 0.0375 dbar

TEMPERATURE RECORDS

Fig. 8.3 and 12.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	165941	-4879.005
LAST DATA POINT:	Aug 15, 1989	055941	5429.995

Number of Points: 20619

Sampling Interval: 0.5 hrs

Minimum = 2.231°C

Mean = 2.260°C

Maximum = 2.325°C Standard Deviation = 0.0096°C

40HRLP TEMPERATURE RECORDS

Fig. 15.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 12, 1988	1800	-4854
LAST DATA POINT:	Aug 14, 1989	0600	5406

Number of Points: 1711

Sampling Interval: 6.0 hrs

Minimum = 2.234 °C

Mean = 2.260 °C

Maximum = 2.298 °C Standard Deviation = 0.009 °C

**Site and Record Information for
PIES89H4**

Serial Number: H4
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 19327

POSITION: 37°39.80 N DEPTH: 4445 m
 68°35.40 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 14, 1988	1716	Oc200
RELEASE:	Aug 15, 1989	0121	Oc210

TRAVEL TIME RECORDS

Fig. 6.20 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 14, 1988	181626	-4805.726
LAST DATA POINT:	Aug 15, 1989	004626	5424.774

Number of Points: 20462
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.30626$ s Mean = 0.32602 s
 Maximum $\tau = 0.34220$ s Standard Deviation = 0.01027 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 6589 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 15, 1988	1800	-4782
LAST DATA POINT:	Aug 14, 1989	0000	5400

Number of Points: 1698
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 105.5$ m Mean = 395.5 m
 Maximum $Z_{12} = 748.5$ m Standard Deviation = 194.7 m

PIES89H4 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.4

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 14, 1988	181431	-4805.758
LAST DATA POINT:	Aug 15, 1989	004431	5424.742

Number of Points: 20462

Sampling Interval: 0.5 hrs

Minimum = 4542.17 dbar

Mean = 4542.99 dbar

Maximum = 4543.85 dbar Standard Deviation = 0.32932 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.4 and 11.2

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = P_3 + P_4 t$$

where t = Time of sample in hours, starting with
t = 13.0hrs for the first data point

$$P_3 = -0.129100 \text{ dbar}$$

$$P_4 = 0.000025 \text{ dbar hr}^{-1}$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42651	.09628	.09292	.02207	.08058	.06280	.02647	.01394
G°:	352.87	334.01	20.57	22.49	177.09	182.01	177.82	180.32

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 15, 1988	061431	-4793.758
LAST DATA POINT:	Aug 15, 1989	004431	5424.742

Number of Points: 20438

Sampling Interval: 0.5 hrs

Minimum = -0.1610 dbar

Mean = 0.0000 dbar

Maximum = 0.1476 dbar Standard Deviation = 0.0461 dbar

PIES89H4 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 16, 1988	0600	—4770
LAST DATA POINT:	Aug 14, 1989	0000	5400

Number of Points: 1696

Sampling Interval: 6.0 hrs

Minimum = -0.1283 dbar

Mean = -0.0002 dbar

Maximum = 0.1343 dbar Standard Deviation = 0.0439 dbar

TEMPERATURE RECORDS

Fig. 8.4 and 12.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 14, 1988	181431	-4805.758
LAST DATA POINT:	Aug 15, 1989	004431	5424.742

Number of Points: 20462

Sampling Interval: 0.5 hrs

Minimum = 2.353°C

Mean = 2.412°C

Maximum = 2.500°C Standard Deviation = 0.016°C

40HRLP TEMPERATURE RECORDS

Fig. 15.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 18, 1988	0000	—4728
LAST DATA POINT:	Aug 14, 1989	0000	5400

Number of Points: 1698

Sampling Interval: 6.0 hrs

Minimum = 2.354 °C

Mean = 2.412 °C

Maximum = 2.480 °C Standard Deviation = 0.015 °C

Site and Record Information for PIES89H5

Serial Number: 71
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 31724

POSITION: 37°10.60 N DEPTH: 4790 m
 68°17.00 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 7, 1988	2102	Oc200
RELEASE:	Aug 14, 1989	1738	Oc210

TRAVEL TIME RECORDS

Fig. 6.21 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 7, 1988	220220	-4969.961
LAST DATA POINT:	Aug 14, 1989	173220	5417.539

Number of Points: 20776
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.39052$ s Mean = 0.40443 s
 Maximum $\tau = 0.42990$ s Standard Deviation = 0.01309 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 8265 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	0000	-4944
LAST DATA POINT:	Aug 13, 1989	1800	5394

Number of Points: 1724
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 128.8$ m Mean = 581.3 m
 Maximum $Z_{12} = 832.3$ m Standard Deviation = 246.6 m

PIES89H5 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 7, 1988	221512	-4969.743
LAST DATA POINT:	Aug 14, 1989	174512	5417.753

Number of Points: 20776

Sampling Interval: 0.5 hrs

Minimum = 4935.22 dbar

Mean = 4936.20 dbar

Maximum = 4937.07 dbar Standard Deviation = 0.33113 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.5 and 11.2

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = P_1 \exp(-P_2 t) + P_3$$

where t = Time of sample in hours, starting with
t = 13.0hrs for the first data point

$$P_1 = -0.47326 \text{ dbar}$$

$$P_2 = 0.002600 \text{ hr}^{-1}$$

$$P_3 = 0.017783 \text{ dbar}$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42418	..09586	.09332	.02221	.07929	.06266	.02609	.01386
G°:	353.25	334.09	21.43	23.38	177.37	183.08	178.27	180.70

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 8, 1988	101512	-4957.743
LAST DATA POINT:	Aug 14, 1989	174512	5417.753

Number of Points: 20752

Sampling Interval: 0.5 hrs

Minimum = -0.2051 dbar

Mean = 0.0001 dbar

Maximum = 0.1749 dbar Standard Deviation = 0.0764 dbar

PIES89H5 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	1200	-4932
LAST DATA POINT:	Aug 13, 1989	1800	5394

Number of Points: 1722

Sampling Interval: 6.0 hrs

Minimum = -0.1928 dbar

Mean = 0.0001 dbar

Maximum = 0.1536 dbar Standard Deviation = 0.0752 dbar

TEMPERATURE RECORDS

Fig. 8.4 and 12.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 7, 1988	222944	-4969.504
LAST DATA POINT:	Aug 14, 1989	175944	5417.996

Number of Points: 20776

Sampling Interval: 0.5 hrs

Minimum = 2.386°C

Mean = 2.461°C

Maximum = 2.520°C Standard Deviation = 0.016°C

40HRLP TEMPERATURE RECORDS

Fig. 15.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	0000	-4944
LAST DATA POINT:	Aug 13, 1989	1800	5394

Number of Points: 1724

Sampling Interval: 6.0 hrs

Minimum = 2.398 °C

Mean = 2.461 °C

Maximum = 2.502 °C Standard Deviation = 0.015 °C

**Site and Record Information for
PIES89H6**

Serial Number: 67
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 33824

POSITION: 36°40.45 N DEPTH: 4883 m
 68°15.64 W

	DATE	GMT	CRUISE
LAUNCH:	May 22, 1988	2259	Oc200
RELEASE:	Jun 3, 1989	2237	Oc207

TRAVEL TIME RECORDS

Fig. 6.22 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 23, 1988	000155	-5351.968
LAST DATA POINT:	Jun 3, 1989	223430	3694.575

Number of Points: 18094
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.05112$ s Mean = 0.06132 s
 Maximum $\tau = 0.08815$ s Standard Deviation = 0.00474 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig.13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 1995 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 24, 1988	0000	-5328
LAST DATA POINT:	Jun 3, 1989	0000	3672

Number of Points: 1501
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 341.2$ m Mean = 830.6 m
 Maximum $Z_{12} = 1011.6$ m Standard Deviation = 88.6 m

PIES89H6 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.6

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 23, 1988	001449	-5351.753
LAST DATA POINT:	Jun 3, 1989	224724	3694.790

Number of Points: 18094
Sampling Interval: 0.5 hrs

Minimum = 4988.02 dbar Mean = 4988.78 dbar
Maximum = 4989.61 dbar Standard Deviation = 0.32203 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.6 and 11.2

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = 0.0$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42146	..09483	.09293	.02212	.07894	.06172	.02598	.01352
G°:	353.79	334.82	21.50	23.41	178.50	183.52	179.15	182.55

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 23, 1988	121449	-5339.753
LAST DATA POINT:	Jun 3, 1989	224724	3694.790

Number of Points: 18070
Sampling Interval: 0.5 hrs

Minimum = -0.1593 dbar Mean = -0.0001 dbar
Maximum = 0.3433 dbar Standard Deviation = 0.0663 dbar

PIES89H6 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 24, 1988	1200	-5316
LAST DATA POINT:	Jun 3, 1989	0000	3672

Number of Points: 1499

Sampling Interval: 6.0 hrs

Minimum = -0.1268 dbar

Mean = -0.0004 dbar

Maximum = 0.2754 dbar Standard Deviation = 0.0641 dbar

TEMPERATURE RECORDS

Fig. 8.6 and 12.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 23, 1988	002921	-5352.511
LAST DATA POINT:	Jun 3, 1989	230156	3695.032

Number of Points: 18094

Sampling Interval: 0.5 hrs

Minimum = 2.464°C

Mean = 2.520°C

Maximum = 2.565°C Standard Deviation = 0.0106°C

40HRLP TEMPERATURE RECORDS

Fig. 15.2

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 24, 1988	0000	-5328
LAST DATA POINT:	Jun 3, 1989	0000	3672

Number of Points: 1501

Sampling Interval: 6.0 hrs

Minimum = 2.466 °C

Mean = 2.520 °C

Maximum = 2.543 °C Standard Deviation = 0.0099 °C

**Site and Record Information for
IES89H7_207**

Serial Number: 52
Type of Travel Time Detector: TTC
Number of Pings per Sampling: 024
Additional Sensors: None

POSITION: 36°24.53 N DEPTH: 4880 m
67°47.06 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 6, 1988	0959	Oc200
RELEASE:	Jun 17, 1989	1545	Oc207

TRAVEL TIME RECORDS

Fig. 6.23 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 6, 1988	110155	-5004.968
LAST DATA POINT:	Jun 17, 1989	152812	4023.470

Number of Points: 18058
Sampling Interval: 0.5 hr

Minimum $\tau = 0.11328$ s Mean = 0.12160 s
Maximum $\tau = 0.13790$ s Standard Deviation = .00329 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
where B= 3143 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 7, 1988	1200	-4980
LAST DATA POINT:	Jun 16, 1989	1800	4002

Number of Points: 1498
Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 533.8$ m Mean = 832.6 m
Maximum $Z_{12} = 975.8$ m Standard Deviation = 62.0 m

Table 26: **IES89H7_207**

**Site and Record Information for
IES89H7_210**

Serial Number: 41
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 36°24.90 N DEPTH: 4880 m
 67°48.10 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 17, 1989	1756	Oc207
RELEASE:	Aug 16, 1989	1236	Oc210

TRAVEL TIME RECORDS

Fig. 6.24 and 10.5

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 17, 1989	190152	4027.031
LAST DATA POINT:	Aug 16, 1989	123152	5460.531

Number of Points: 2868
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.12458$ s Mean = 0.13918 s
 Maximum $\tau = 0.15612$ s Standard Deviation = 0.01038 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.5

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 3127 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 18, 1989	1800	4050
LAST DATA POINT:	Aug 15, 1989	1200	5436

Number of Points: 232
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 175.2$ m Mean = 483.2 m
 Maximum $Z_{12} = 749.8$ m Standard Deviation = 193.9 m

Site and Record Information for PIES89I1

Serial Number: 72
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 33822

POSITION: 38°47.54 N DEPTH: 3828 m
 68°06.38 W

	DATE	GMT	CRUISE
LAUNCH:	May 24, 1988	2328	Oc200
RELEASE:	May 30, 1989	1805	Oc207

TRAVEL TIME RECORDS

Fig. 6.25 and 10.6

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 25, 1988	003155	-5303.468
LAST DATA POINT:	Feb 1, 1989	233507	767.75853

Number of Points: 12143
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.29219$ s Mean = 0.30313 s
 Maximum $\tau = 0.31320$ s Standard Deviation = 0.00371 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.6

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 5921 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 26, 1988	0000	-5280
LAST DATA POINT:	Feb 1, 1989	0000	744

Number of Points: 1005
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 18.0$ m Mean = 161.1 m
 Maximum $Z_{12} = 358.6$ m Standard Deviation = 69.4 m

PIES89I1 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.7

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 25, 1988	004449	-5303.253
LAST DATA POINT:	Feb 1, 1989	234801	767.800

Number of Points: 12143

Sampling Interval: 0.5 hrs

Minimum = 3893.05 dbar

Mean = 3893.88 dbar

Maximum = 3894.68 dbar Standard Deviation = 0.31903 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.7 and 11.3

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = 0.0$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42487	..09608	.09337	.02232	.08065	.06279	.02653	.01372
G° :	353.30	335.36	21.11	23.11	175.15	180.68	176.13	177.48

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 25, 1988	124449	-5291.253
LAST DATA POINT:	Feb 1, 1989	234812	767.800

Number of Points: 12119

Sampling Interval: 0.5 hrs

Minimum = -0.1907 dbar

Mean = -0.0001 dbar

Maximum = 0.1089 dbar Standard Deviation = 0.0433 dbar

PIES89I1 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 26, 1988	1200	-5268
LAST DATA POINT:	Feb 1, 1989	0000	744

Number of Points: 1003

Sampling Interval: 6.0 hrs

Minimum = -0.1535 dbar

Mean = -0.0002 dbar

Maximum = 0.0803 dbar Standard Deviation = 0.0404 dbar

TEMPERATURE RECORDS

Fig. 8.7 and 12.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 25, 1988	005921	-5303.011
LAST DATA POINT:	Feb 1, 1989	000232	768.042

Number of Points: 12143

Sampling Interval: 0.5 hrs

Minimum = 2.493°C

Mean = 2.527°C

Maximum = 2.799°C Standard Deviation = 0.0197°C

40HRLP TEMPERATURE RECORDS

Fig. 15.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 26, 1988	0000	-5280
LAST DATA POINT:	Feb 1, 1989	0000	744

Number of Points: 1005

Sampling Interval: 6.0 hrs

Minimum = 2.494 °C

Mean = 2.527 °C

Maximum = 2.607 °C Standard Deviation = 0.016 °C

**Site and Record Information for
PIES89I2**

Serial Number: 66
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 31162

POSITION: 38°20.90 N DEPTH: 4720 m
 67°59.60 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 9, 1988	1813	Oc200
RELEASE:	May 30, 1989	0649	Oc207

TRAVEL TIME RECORDS

Fig. 6.26 and 10.6

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	193155	-4924.468
LAST DATA POINT:	May 30, 1989	062938	3582.464

Number of Points: 17015
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.04123$ s Mean = 0.05942 s
 Maximum $\tau = 0.06530$ s Standard Deviation = 0.00264 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.6

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 1313 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	1800	-4902
LAST DATA POINT:	May 29, 1989	0600	3558

Number of Points: 1411
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 92.9$ m Mean = 184.3 m
 Maximum $Z_{12} = 515.9$ m Standard Deviation = 49.4 m

PIES89I2 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.8

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	194449	-4924.253
LAST DATA POINT:	May 30, 1989	064232	3582.709

Number of Points: 17015

Sampling Interval: 0.5 hrs

Minimum = 4328.91 dbar

Mean = 4329.90 dbar

Maximum = 4330.79 dbar Standard Deviation = 0.33345 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.8 and 11.3

$$P_{residual} = P_{measured} - MEAN - TIDE$$

$$DRIFT = P_1 \exp(-P_2 t) + P_3 + P_4 t$$

where t = Time of sample in hours, starting with
t = 13.0hrs for the first data point

$$P_1 = -0.369500 \text{ dbar}$$

$$P_2 = 0.002260 \text{ hr}^{-1}$$

$$P_3 = -0.073663 \text{ dbar}$$

$$P_4 = 0.000022 \text{ dbar hr}^{-1}$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42247	..09551	.09385	.02244	.07996	.06307	.02624	.01422
G°:	352.84	334.30	19.86	21.59	175.85	180.80	176.84	176.87

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	074449	-4912.253
LAST DATA POINT:	May 30, 1989	064232	3582.709

Number of Points: 16991

Sampling Interval: 0.5 hrs

Minimum = -0.1388 dbar

Mean = 0.0000 dbar

Maximum = 0.1965 dbar Standard Deviation = 0.0444 dbar

PIES89I2 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	0600	-4890
LAST DATA POINT:	May 29, 1989	0600	3558

Number of Points: 1409

Sampling Interval: 6.0 hrs

Minimum = -0.1047 dbar

Mean = 0.0001 dbar

Maximum = 0.1640 dbar Standard Deviation = 0.0407 dbar

TEMPERATURE RECORDS

Fig. 8.8 and 12.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	195921	-4924.011
LAST DATA POINT:	May 30, 1989	065704	3582.951

Number of Points: 17015

Sampling Interval: 0.5 hrs

Minimum = 2.454°C

Mean = 2.489°C

Maximum = 2.550°C Standard Deviation = 0.0116°C

40HRLP TEMPERATURE RECORDS

Fig. 15.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	1800	-4902
LAST DATA POINT:	May 29, 1989	0600	3558

Number of Points: 1411

Sampling Interval: 6.0 hrs

Minimum = 2.460 °C

Mean = 2.489 °C

Maximum = 2.544 °C Standard Deviation = 0.011 °C

Site and Record Information for PIES89I4

Serial Number: 54
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 17849

POSITION: 37°18.50 N DEPTH: 4775 m
 67°39.30 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 8, 1988	1748	Oc200
RELEASE:	Jun 16, 1989	0804	Oc207

TRAVEL TIME RECORDS

Fig. 6.27 and 10.6

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 8, 1988	190155	-4948.968
LAST DATA POINT:	Jun 16, 1989	075928	3991.991

Number of Points: 17883
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.35584$ s Mean = 0.36708 s
 Maximum $\tau = 0.39509$ s Standard Deviation = 0.010821 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.6

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 7610 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	1800	-4926
LAST DATA POINT:	Jun 15, 1989	0600	3966

Number of Points: 1483
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 117.3$ m Mean = 636.7 m
 Maximum $Z_{12} = 832.7$ m Standard Deviation = 204.7 m

PIES89I4 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.9

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 8, 1988	190000	-4949.000
LAST DATA POINT:	Jun 16, 1989	075733	3991.959

Number of Points: 17883

Sampling Interval: 0.5 hrs

Minimum = 4906.90 dbar

Mean = 4907.67 dbar

Maximum = 4908.56 dbar Standard Deviation = 0.32976 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.9 and 11.3

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = 0.0$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.42224	.09503	.09424	.02247	.07800	.06181	.02567	.01369
G° :	353.21	333.82	20.82	22.58	177.12	182.27	177.86	180.76

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	070000	-4937.000
LAST DATA POINT:	Jun 16, 1989	075732	3991.959

Number of Points: 17859

Sampling Interval: 0.5 hrs

Minimum = -0.3536 dbar

Mean = 0.0002 dbar

Maximum = 0.3154 dbar Standard Deviation = 0.0966 dbar

PIES89I4 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	0600	-4914
LAST DATA POINT:	Jun 15, 1989	0600	3966

Number of Points: 1481

Sampling Interval: 6.0 hrs

Minimum = -0.3229 dbar

Mean = 0.0007 dbar

Maximum = 0.2731 dbar Standard Deviation = 0.0953 dbar

TEMPERATURE RECORDS

Fig. 8.9 and 12.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 8, 1988	190000	-4949.000
LAST DATA POINT:	Jun 16, 1989	075733	3991.959

Number of Points: 17883

Sampling Interval: 0.5 hrs

Minimum = 2.267°C

Mean = 2.323°C

Maximum = 2.380°C Standard Deviation = 0.0132°C

40HRLP TEMPERATURE RECORDS

Fig. 15.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	1800	-4926
LAST DATA POINT:	Jun 15, 1989	0600	3966

Number of Points: 1483

Sampling Interval: 6.0 hrs

Minimum = 2.267 °C

Mean = 2.323 °C

Maximum = 2.353 °C Standard Deviation = 0.013 °C

**Site and Record Information for
PIES89I5**

Serial Number: 73
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: Pressure and Temperature
 Pressure Sensor Serial Number: 31694

POSITION: 36°49.73 N DEPTH: 4975 m
 67°27.57 W

	DATE	GMT	CRUISE
LAUNCH:	May 23, 1988	2055	Oc200
RELEASE:	Jun 3, 1989	0837	Oc210

TRAVEL TIME RECORDS

Fig. 6.28 and 10.6

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 23, 1988	223231	-5329.458
LAST DATA POINT:	Jun 3, 1989	080231	3680.042

Number of Points: 18020
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.16916$ s Mean = 0.18094 s
 Maximum $\tau = 0.21013$ s Standard Deviation = 0.00703 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.6

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 4246 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 25, 1988	0000	-5304
LAST DATA POINT:	Jun 2, 1989	0600	3654

Number of Points: 1494
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 279.5$ m Mean = 809.4 m
 Maximum $Z_{12} = 1008.3$ m Standard Deviation = 130.5 m

PIES89I5 (continued)**MEASURED PRESSURE RECORDS**

Fig. 7.10

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 23, 1988	224523	-5329.244
LAST DATA POINT:	Jun 3, 1989	081523	3680.257

Number of Points: 18020
Sampling Interval: 0.5 hrs

Minimum = 5081.76 dbar Mean = 5082.61 dbar
Maximum = 5083.47 dbar Standard Deviation = 0.32507 dbar

RESIDUAL PRESSURE RECORDS

Fig. 9.10 and 11.3

$$P_{residual} = P_{measured} - MEAN - DRIFT - TIDE$$

$$DRIFT = 0.0$$

TIDE calculated from the following constituents:

	M2	N2	S2	K2	K1	O1	P1	Q1
H (dbar):	.41636	..09365	.09320	.02226	.07641	.06031	.02513	.01337
G°:	353.51	334.34	21.62	23.57	177.68	182.75	178.58	179.85

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 24, 1988	104523	-5317.244
LAST DATA POINT:	Jun 3, 1989	081523	3679.257

Number of Points: 17996
Sampling Interval: 0.5 hrs

Minimum = -0.3650 dbar Mean = 0.0000 dbar
Maximum = 0.2510 dbar Standard Deviation = 0.0943 dbar

PIES89I5 (continued)**40HRLP PRESSURE RECORDS**

Fig. 14.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 25, 1988	1200	-5292
LAST DATA POINT:	Jun 2, 1989	0600	3654

Number of Points: 1492

Sampling Interval: 6.0 hrs

Minimum = -0.3298 dbar

Mean = 0.0009 dbar

Maximum = 0.2186 dbar

Standard Deviation = 0.0921 dbar

TEMPERATURE RECORDS

Fig. 8.10 and 12.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 23, 1988	225955	-5329.001
LAST DATA POINT:	Jun 3, 1989	082955	3680.499

Number of Points: 18020

Sampling Interval: 0.5 hrs

Minimum = 2.430°C

Mean = 2.491°C

Maximum = 2.535°C

Standard Deviation = 0.0137°C

40HRLP TEMPERATURE RECORDS

Fig. 15.3

	DATE	GMT	YEARHOUR
1st DATA POINT:	May 25, 1988	0000	-5304
LAST DATA POINT:	Jun 2, 1989	0600	3654

Number of Points: 1494

Sampling Interval: 6.0 hrs

Minimum = 2.429 °C

Mean = 2.491 °C

Maximum = 2.531 °C

Standard Deviation = 0.0132°C

Site and Record Information for IES89J1

Serial Number: 44
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 39°10.04 N DEPTH: 3480 m
 67°47.08 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 10, 1988	1904	Oc200
RELEASE:	May 30, 1989	2350	Oc207

TRAVEL TIME RECORDS

Fig. 6.29 and 10.7

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	200155	-4899.968
LAST DATA POINT:	May 30, 1989	232906	3599.485

Number of Points: 17000
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.236471\text{s}$ Mean = 0.25014 s
 Maximum $\tau = 0.25823\text{ s}$ Standard Deviation = 0.004895 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.7

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 4946 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	1800	-4878
LAST DATA POINT:	May 30, 1989	0000	3576

Number of Points: 1410
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 59.6\text{ m}$ Mean = 193.4 m
 Maximum $Z_{12} = 487.1\text{ m}$ Standard Deviation = 92.7 m

**Site and Record Information for
IES89J2**

Serial Number: 37
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 38°45.59 N DEPTH: 4270 m
 67°21.57 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 10, 1988	1450	Oc200
RELEASE:	May 31, 1989	0459	Oc207

TRAVEL TIME RECORDS

Fig. 6.30 and 10.7

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	154156	-4904.301
LAST DATA POINT:	May 31, 1989	043535	3604.593

Number of Points: 17019
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.07790$ s Mean = 0.09293 s
 Maximum $\tau = 0.09850$ s Standard Deviation = 0.00272 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.7

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 1955 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	1200	-4884
LAST DATA POINT:	May 30, 1989	0600	3582

Number of Points: 1412
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 99.1$ m Mean = 189.3 m
 Maximum $Z_{12} = 464.8$ m Standard Deviation = 51.2 m

Site and Record Information for IES89J3

Serial Number: 50
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 38°09.03 N DEPTH: 4635 m
 67°10.06 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 9, 1988	0849	Oc200
RELEASE:	Jun 6, 1989	2246	Oc207

TRAVEL TIME RECORDS

Fig. 6.31 and 10.7

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 9, 1988	100058	-4933.984
LAST DATA POINT:	Jun 6, 1989	223058	3766.516

Number of Points: 17402
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.18466$ s Mean = 0.17479 s
 Maximum $\tau = 0.15779$ s Standard Deviation = 0.00716 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.7

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 3641 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	1200	-4908
LAST DATA POINT:	Jun 6, 1989	0000	3744

Number of Points: 1443
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 150.1$ m Mean = 319.9 m
 Maximum $Z_{12} = 624.7$ m Standard Deviation = 135.3 m

Table 34: **IES89J3**

**Site and Record Information for
IES89J4**

Serial Number: 35
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 37°37.84 N DEPTH: 4875 m
 67°00.65 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 10, 1988	0649	Oc200
RELEASE:	Jun 7, 1989	0701	Oc207

TRAVEL TIME RECORDS

Fig. 6.32 and 10.7

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 10, 1988	080708	-4911.881
LAST DATA POINT:	Jun 7, 1989	060708	3774.119

Number of Points: 17373
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.07105$ s Mean = 0.08170 s
 Maximum $\tau = 0.10452$ s Standard Deviation = 0.08111 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.7

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B = 2163 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 11, 1988	0600	-4890
LAST DATA POINT:	Jun 6, 1989	0600	3750

Number of Points: 1441
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 198.9$ m Mean = 611.7 m
 Maximum $Z_{12} = 798.9$ m Standard Deviation = 153.0 m

Site and Record Information for IES89J5

Serial Number: 62
 Type of Travel Time Detector: TTC
 Number of Pings per Sampling: 024
 Additional Sensors: None

POSITION: 36°59.83 N DEPTH: 4955 m
 66°56.52 W

	DATE	GMT	CRUISE
LAUNCH:	Jun 6, 1988	1913	Oc200
RELEASE:	Jun 16, 1989	0047	Oc207

TRAVEL TIME RECORDS

Fig. 6.33 and 10.7

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 6, 1988	203155	-4995.468
LAST DATA POINT:	Jun 16, 1989	002928	3984.491

Number of Points: 17961
 Sampling Interval: 0.5 hr

Minimum $\tau = 0.19721$ s Mean = 0.20778 s
 Maximum $\tau = 0.23468$ s Standard Deviation = 0.00525 s

40HRLP THERMOCLINE DEPTH RECORDS

Fig. 13.7

Z_{12} Conversion equation: $Z_{12} = -19000ms^{-1} \cdot \tau_d + B$
 where B= 4756 m
 τ_d = Travel Time (sec) with tide removed

	DATE	GMT	YEARHOUR
1st DATA POINT:	Jun 07, 1988	1800	-4974
LAST DATA POINT:	Jun 15, 1989	0000	3860

Number of Points: 1490
 Sampling Interval: 6.0 hrs

Minimum $Z_{12} = 312.4$ m Mean = 808.4 m
 Maximum $Z_{12} = 990.8$ m Standard Deviation = 99.6 m

3 Half-Hourly Individual Plots

Plots are presented for the individual time series of half-hourly travel time, bottom pressure, temperature, and residual bottom pressure (detided and dedrifted).

The plots for each sensor are displayed in a standardized window. All sensors have a common time axis which starts at -5376 (22-May-1988 referenced to 1-Jan-1989) and extends to 6036 . This time period is displayed in four panels or subplots, two per page. Each panel covers 2928 hr (one third of a leap year). A small tic is placed at each day (0000 GMT) and larger tics denote weeks (168 hr). All IES records were encompassed by this period except IES89G1 which required a third page. For comparison, labels indicating specific dates are centered about their yearhour equivalent (for example a label associates “1-Jan-89” with 0.0 yearhour).

Vertical axes for each sensor will be either common or have common increment. Travel time is plotted within a 4 msec window in increments of $.005$ sec. Pressure is plotted in a 2 dbar window centered about zero. The mean was removed from the series for the purpose of plotting and its value is indicated in the y-axis label. Temperature is plotted in a $.15^{\circ}$ C window adjusted vertically to enclose all the record’s variation. After detiding and dedrifted the bottom pressure, (residual) may be plotted within a 0.8 dbar window centered about zero.

Figure 6.1: Half-Hourly Travel Times. IES89B1_207

Figure 6.2: Half-Hourly Travel Times. IES89B2.210

Figure 6.3: Half-Hourly Travel Times. IES89B3.210

Figure 6.4: Half-Hourly Travel Times. IES89B4.207

Figure 6.5: Half-Hourly Travel Times. IES89B4.210

Figure 6.8: Half-Hourly Travel Times. IES89C1.207

Figure 6.9: Half-Hourly Travel Times. IES89C2.210

Figure 6.10: Half-Hourly Travel Times. IES89F1_207

Figure 6.11: Half-Hourly Travel Times. IES89F2_210

Figure 6.12: Half-Hourly Travel Times. IES89F3_210

Figure 6.13: Half-Hourly Travel Times. IES89G1_207

Figure 6.19: Half-Hourly Travel Times. PIES89H3.210

Figure 6.20: Half-Hourly Travel Times. PIES89H4.210

Figure 6.21: Half-Hourly Travel Times. PIES89H5_210

Figure 6.22: Half-Hourly Travel Times. PIES89H6.207

Figure 6.23: Half-Hourly Travel Times. IES89H7_207

Figure 6.24: Half-Hourly Travel Times. IES89H7_210

Figure 7.2: Half-Hourly Bottom Pressure. PIES89G3_207

Figure 7.3: Half-Hourly Bottom Pressure. PIES89H3_210

Figure 7.4: Half-Hourly Bottom Pressure. PIES89H4_210

Figure 7.5: Half-Hourly Bottom Pressure. PIES89H5_210

Figure 7.6: Half-Hourly Bottom Pressure. PIES89H6_207

Figure 7.9: Half-Hourly Bottom Pressure. PIES89I4_207

Figure 8.1: Half-Hourly Temperature. PIES89G2.213

Figure 8.2: Half-Hourly Temperature. PIES89G3_207

Figure 8.3: Half-Hourly Temperature. PIES89H3.210

Figure 8.4: Half-Hourly Temperature. PIES89H4.210

Figure 8.5: Half-Hourly Temperature. PIES89H5.210

Figure 8.6: Half-Hourly Temperature. PIES89H6.207

Figure 8.7: Half-Hourly Temperature. PIES89I1_207

Figure 8.10: Half-Hourly Temperature. PIES89I5_207

Figure 9.3: Half-Hourly Residual Bottom Pressure. PIES89H3_210

Figure 9.4: Half-Hourly Residual Bottom Pressure. PIES89H4_210

Figure 9.5: Half-Hourly Residual Bottom Pressure. PIES89H5_210

4 Half-Hourly Line Plots

Travel time, residual bottom pressure, and temperature are plotted, grouped according to instrument–line, B,... J. Line plots display all records in a given line on a single page (except line h which was presented on two pages). All line plots have a time axis running from -6000 hr to 7000 hr in increments of 1000 hr. As with the individual plots, labels associating calendar dates with yearhours are centered beneath the appropriate location.

The vertical axes for each instrument in the line should be the same as those used in the individual plots (section 3). For a given record (travel time, temperature, or pressure) the vertical axis will be consistent for all instruments.

The individual records that compose the line plots are labeled with the site at the right (at yearhour=6500, and centered within the record's vertical axis). It should also be noted that the records of travel time of H7_207 and H7_210 were merged, plotted together in the same panel rather than apart. B4_207 and B4_210; and B5_207 and B5_210 were treated similarly.

Figure 10.1: Half-Hourly Travel Times. B line

Figure 10.2: Half-Hourly Travel Times. C line

Figure 10.3: Half-Hourly Travel Times. F line

Figure 10.4: Half-Hourly Travel Times. G line

Figure 10.5: Half-Hourly Travel Times. H line

Figure 10.6: Half-Hourly Travel Times. I line

Figure 10.7: Half-Hourly Travel Times. J line

Figure 11.1: Half-Hourly Residual Bottom Pressure. G line

Figure 11.2: Half-Hourly Residual Bottom Pressure. H line

Figure 11.3: Half-Hourly Residual Bottom Pressure. I line

Figure 12.1: Half-Hourly Temperature. G line

Figure 12.2: Half-Hourly Temperature. H line

Figure 12.3: Half-Hourly Temperature. I line

5 40HRLP Line Plots

Thermocline depth, residual bottom pressure, and temperature are plotted by, grouped according to instrument – line, B,...J. Line plots display all records in a given line on a single page (except H line which was presented in two pages). All line plots have the time axis running from -6000 hr to 7000 hr in increments of 1000 hr. As with the individual plots, labels associating calendar dates with yearhours are centered beneath the appropriate location.

For temperature and residual bottom pressure the vertical axes for each instrument in the line should be the same as those used in the individual plots (section 3). The vertical axis for Z_{12} is fixed as ranging from 1000m depth to the surface in increments of 100 m.

The individual records that compose the line plots are labeled with the site at the right (yearhour=6500, and centered in the record's vertical axis). It should also be noted that the records of Z_{12} records of H7_207 and H7_210 were merged, plotted together in the same panel rather than apart. B4_207 and B4_210; and B5_207 and B5_210 were treated similarly.

Figure 13.1: 40HRLP Z_{12} . B line

Figure 13.2: 40HRLP Z_{12} . C line

Figure 13.3: 40HRLP Z_{12} . F line

Figure 13.4: 40HRLP Z_{12} . G line

Figure 13.5: 40HRLP Z_{12} . H line

Figure 13.6: 40HRLP Z_{12} . I line

Figure 13.7: 40HRLP Z_{12} . J line

Figure 14.1: 40HRLP Residual Bottom Pressure. G line

Figure 14.2: 40HRLP Residual Bottom Pressure. H line

Figure 14.3: 40HRLP Residual Bottom Pressure. I line

Figure 15.1: 40HRLP Temperature. G line

Figure 15.2: 40HRLP Temperature. H line

Figure 15.3: 40HRLP Temperature. I line

Acknowledgments

The SYNOP Experiment was supported by the Office of Naval Research under contract number N00014-87-K-0235 and the National Science Foundation under grant number OCE87-17144. We thank the crews of the R/V OCEANUS and R/V ENDEAVOR for their efforts during the deployment and recovery cruises. The successful deployment and recovery of the inverted echo sounders is due to the instrument development and careful preparation done by Gerard Chaplin and Michael Mulroney. It is a pleasure to acknowledge their efforts. Special thanks goes to Stephen Wood who helped in the data processing.

REFERENCES

- Chaplin, G. and D. R. Watts. 1984. Inverted echo sounder development. *Oceans '84 Conference Record. 1*. 249-253.
- Munk, W. H. and D. E. Cartwright. 1977. Tidal spectroscopy and prediction. *Philos. Trans. R. Soc. London*, 259, 533-581.
- Press, W.H., B.P. Flannery, S.A. Teukolsky,, and W.T. Vetterling 1988. *Numerical Recipes* Cambridge University Press, New York.
- Rossby, T. 1969. On monitoring depth variations of the main thermocline acoustically. *J. Geophys. Res.* 74. 5542-5546.
- Fields E., K.L. Tracey, and D. R. Watts. 1990. Inverted echo sounder processing procedures. University of Rhode Island. GSO Technical Report (in preparation).
- Watts, D. R. and W. E. Johns. 1982. Gulf Stream meanders: observations on propagation and growth. *J. Geophys. Res.* 87. 9467-9476.
- Watts, D. R. and H. Kontoyiannis. 1986. Deep-ocean bottom pressure and temperature sensors report: methods and data. University of Rhode Island. GSO Technical Report 86-8. 111 pp.
- Watts, D. R. and H. T. Rossby. 1977. Measuring dynamic heights with inverted echo sounders: Results from MODE. *J. Phys. Oceanogr.* 7. 345-358.
- Watts, D. R., K. L. Tracey and A. I. Friedlander. 1988. Processing accurate maps of the Gulf Stream thermal front using objective analysis. *J. Geophys. Res.* (submitted)
- Watts, D. R. and M. Wimbush. 1981. Sea surface height and thermocline depth variations measured from the sea floor. *International Symposium on Acoustic Remote Sensing of the Atmosphere and Oceans, Proceedings*, Calgary, Alberta, Canada.